


Pos. No.	Description	Measurement	Quantity	Item No.
Pos. 1	Fornt part	30.5 × 21.5 × 1.25 in. (780 × 550 × 35 mm)	1	39551-30
Pos. 2	Back wall	30.5 × 19.25 × 1.25 in. (780 × 490 × 35 mm)	1	39551-31
Pos. 3	Left side panel	1 × 18.25 × 17.75 in. (30 × 465 × 455 mm)	1	39551-20
Pos. 4	Right side panel	1 × 18.25 × 17.75 in. (30 × 465 × 455 mm)	1	39551-21
Pos. 5	Side floor plates, large	18.75 × 0.75 × 10.5 in. (477 × 20 × 268 mm)	2	39551-10
Pos. 6	Center floor plate, small	18.75 × 0.75 × 8 in. (477 × 20 × 207 mm)	1	39551-11
Pos. 7	Roof	33.25 × 1.95 × 23.5 in. (850 × 50 × 600 mm)	1	39551-40
Pos. 8	Roof Connecting bar incl hinges	29 × 1.75 × 1.25 in. (738 × 45 × 35 mm)	1	39551-40

Pos. No.	Description	Size	Quantity	Item No.
A	Thead screw with nut	ø 0.236 × 2.362 in. (M6 × 60 mm)	8+1	39551-60
B	Countersunk screw	ø 0.137 × 1.181 in. (ø 3.5 × 30 mm)	5+1	
C	Lenshead screw	ø 0.157 × 0.629 in. (ø 4 × 16 mm)	16+1	
D	Checkstrap, left/right	11 in. (280 mm)	1/1	
E	Countersunk screw	0.118 × 0.629 in. ø 3 × 14 mm	6+1	

Other parts already assembled (spare parts separately available)


Description	Size	Quantity	Item No.
Hinge for roof	2.25 in. (63 mm)	3	39551-60

Ⓔ Screw the front part (1) and the back wall (2) together with the side panels (3/4).

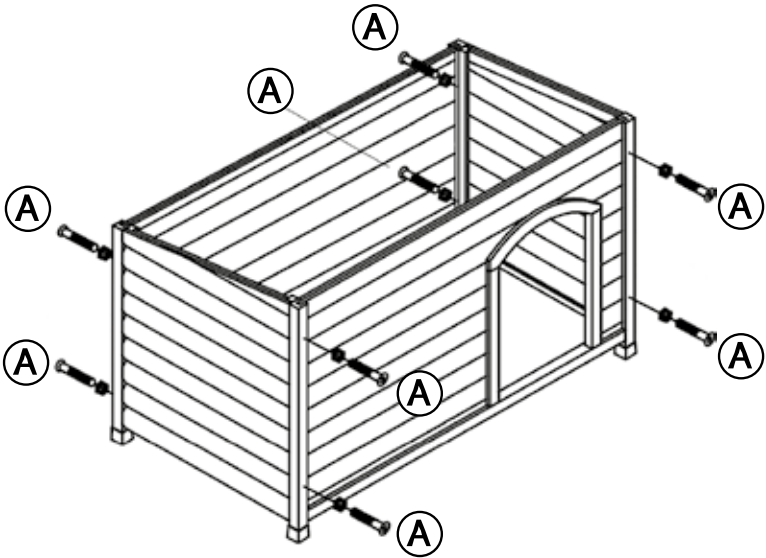


1.

Ⓔ Now insert the floor plates (5/6).

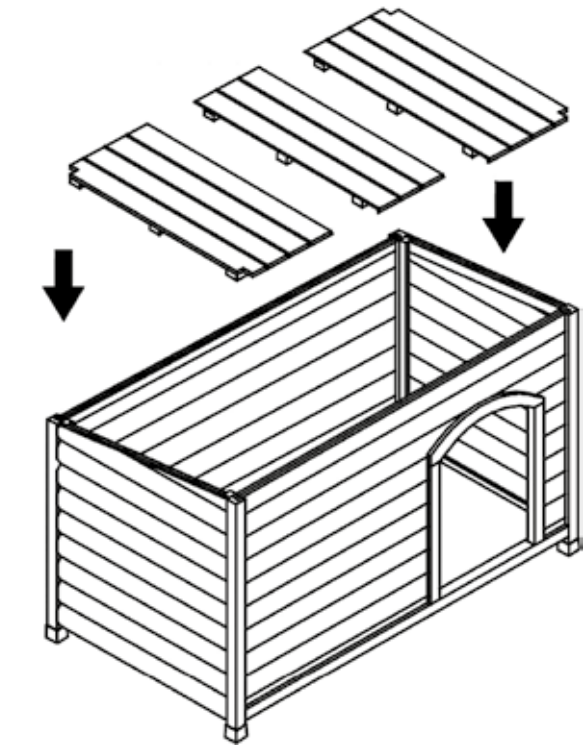


2.

Ⓔ Fix the roof connecting bar (8) to the top of the roof (7).

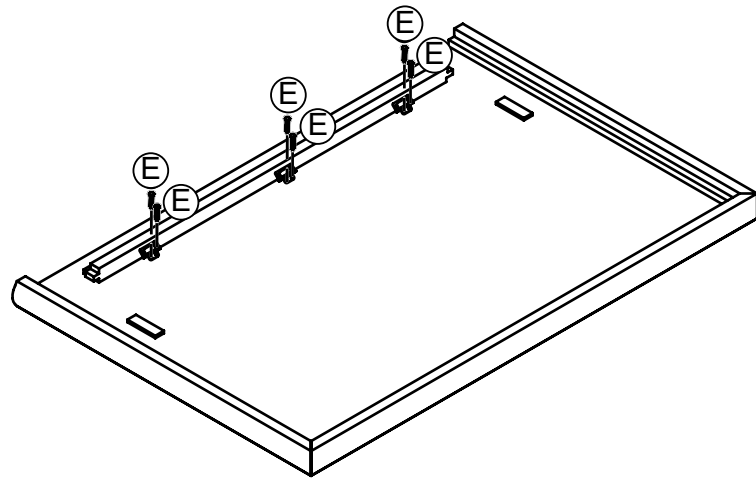

3.

Ⓔ Install the roof (7) with the enclosed screws (B). Screw the check straps (D) to the inner sides of the roof and the side panels.

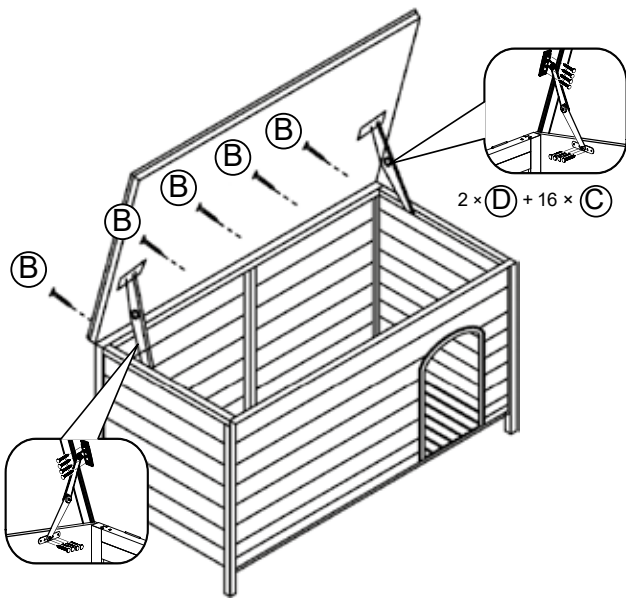

4.