


ltem No.		Color	Co	de	Measu	rement
4991	Set Wall Mounted Climbing Steps	gray/white	4		Diam. 8,5 × 22 cm	
		gray/brown	5	5	Diam. 3.3 × 8.6 in.	
		gray/white	8	8 Diam. 10,5 × 26 cm		
		gray/brown	9		Diam. 4.1 × 10.2 in.	
Description		Quantity	ltem No.			
Wall mounting step		3	Code: 4	Code: 5	Code: 8	Code: 9
			49912-12	49913-12	49918-12	49919-12
Hardware Set		1	49912-60		49918-60	

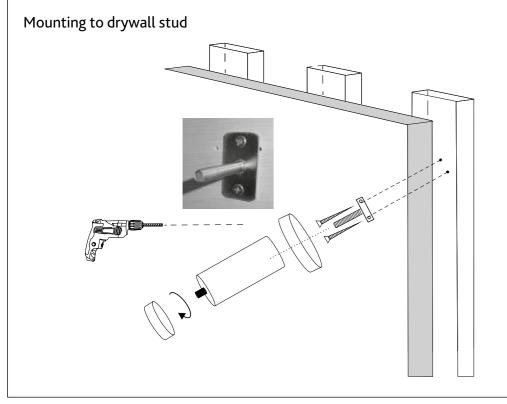

Nork steps for drywall with drywall stud

First Step

Please use a stud finder (or other technique) and a pencil. Bring the products in final position and mark the screw-point on the center of the stud. Use a spirit level or have someone eyeball to make sure the holes are levelled.

Second Step

Use your drill and the 1/16" bit to make pilot holes for maximum 2 inch to all markings.

Third Step

Mount the metal holder with enclosed screws to the stud and make sure the screws are fastened securely. Be careful not to break the drywall panel.


Final Step

Connect the product to the metal holder and attach cap.

Advice:

Please note the secure assembly and mounting requires one adult person.

Mounting to stone wall and plaster wall

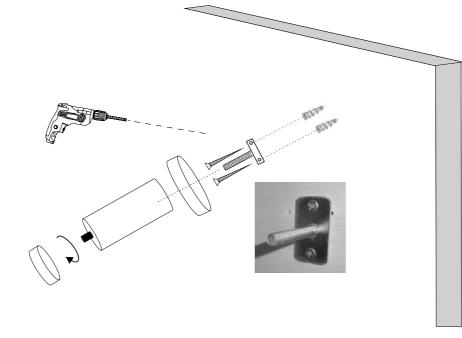

N Work steps for stone wall

First Step

Please use a pencil. Bring the product in final position and mark the screw-points in desired location.

Second Step

Use a 3/16 drill bit for stone or plaster wall. Drill 3/16" holes, be sure to keep the drill level. Make sure hole depth matches wall anchor length.

Third Step

Insert wall anchors (not included) into drilled holes (some anchors might require a hammer). Insert 3/16 wall anchors for stone or plaster material into drilled (some anchors may require a hammer).

Fourth Step

Mount the metal holder with screws matching wall anchor (not included) to the wall.

Final Step

Connect the product to the metal holder and attach cap.

Advice:

Please note the secure assembly and mounting requires one adult person.

Mounting to wooden wall



Nork steps for wooden wall.

First Step

Please use a pencil. Bring t location.


Second Step Use your drill and the 1/16

Third Step Mount the metal holder wi damage the drywall panel.

Final Step

Advice:

TRIXIE Pet Products, Inc. · P.O. Box 101196 · Ft. Worth, TX 76185 · USA · www.trixie.de

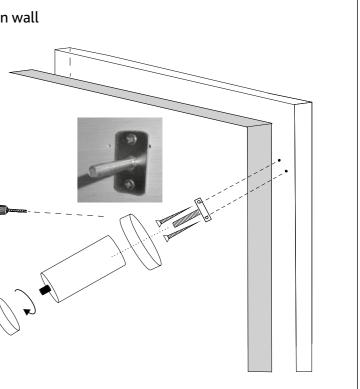

Please use a pencil. Bring the product in final position and mark the screw-points in desired

- Use your drill and the 1/16" bit to make pilot holes for maximum 2 inch to all markings.
- Mount the metal holder with attached screws to the wall through pilot holes. Be careful to not
- Connect the product to the metal holder and attach cap.
- Please note the secure assembly and mounting requires one adult person.